


ORION-A2501

250W 1U ATX power supply
with active PFC

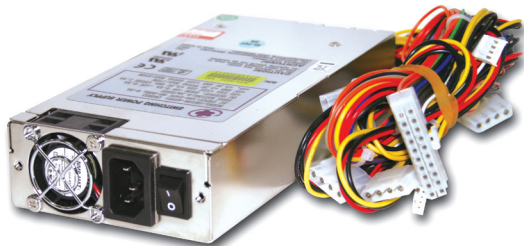

SPECIFICATION

Input Voltage	90V ~ 264V AC, full range
Input Frequency	47 ~ 63 Hz
Input Current	6A@115V, 3A@230V
Efficiency	> 65%
Holdup Time	16 ms at full load
Over Voltage Protection	+5V: 5.4 ~ 6.5V; +3.3V: 3.9 ~ 4.4V; +12V: 13.6 ~ 15.6V
Over Power/Load Protection	Output power over 110% ~ 160%
MTBF	105,405 hrs
EMI & Safety Approval	UL, cUL, TUV, CE, FCC,CCC
Temperature/Humidity	Operating: 5 ~ 40°C, 20 ~ 90%RH Storage: -20 ~ 60°C, 5 ~ 95%RH
Dimension (WxDxH)	100 x 190 x 40.5 mm; 3.93" x 7.48" x 1.59"

FEATURES

- Low profile power supply suitable for 1U and node chassis
- Active PFC, full-range input
- Support for Intel® Pentium® 4 processor
- Total output power of +5V, +3.3V and +12V is 234W

ORDERING GUIDE

- **ORION-A2501**
250W 1U ATX power supply with active PFC

DC OUTPUT

	+5V	+3.3V	+12V	-5V	-12V	+5Vsb
Max. Load	24A	20A	12A	0.5A	0.5A	1.5A
Min. Load	3A	1A	2A	0A	0A	0.1A
Load Reg.	±5%	±5%	±8%	±10%	±10%	±5%
Line Reg.	±1%	±1%	±1%	±1%	±1%	±1%
Ripple & Noise	80mv	80mv	120mv	50mv	150mv	80mv

www.ipc2u.ru www.ipc2u.de www.sovio.com Date: 01/07/2016