


12.1" P-Cap Chassis Display - R12L100-PCM2-PoE

Features

- 12.1" 1024 x 768 Resolution
- Projected Capacitive Multi-Touch (P-Cap)
- Front IP65 Water and Dust Proof
- VGA input and variety of optional connectors
- USB port for touch
- Stylish and elegant design
- Supports PoE

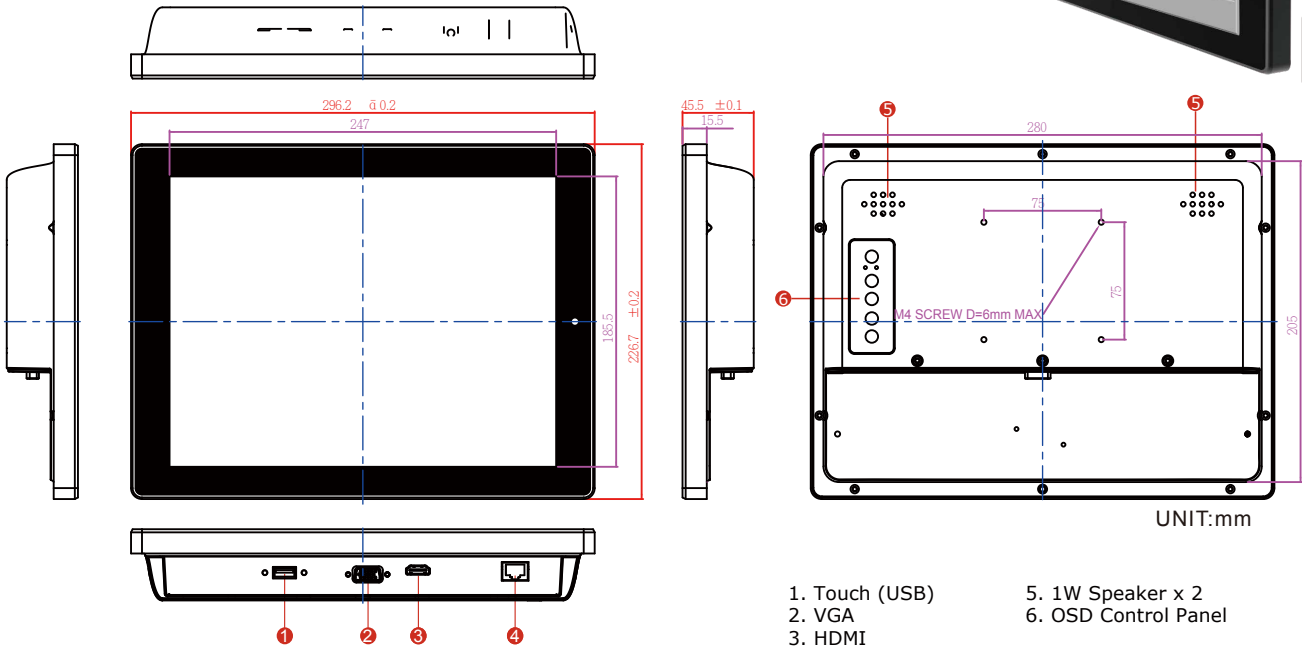

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

- 1. Touch (USB)
- 2. VGA
- 3. HDMI
- 4. PoE
- 5. 1W Speaker x 2
- 6. OSD Control Panel

Specifications

Display

- Panel Size : 12.1"
- Active Display Area(mm) : 245.76(H) x 184.32(V)
- Resolution : 1024 x 768
- Brightness(cd/m2) : 500 (Typical)
- Contrast Ratio : 700:1 (Typical)
- Viewing Angles(CR>=10 L/R/U/D) : -80~80(H) ; -70~70(V)
- Display Colors : 16.2M (6 bits/color)
- Standard Input Signal : 1 x VGA (D-sub 15)
1 x HDMI (Type-A)

Output

- Touch Screen : Projected Capacitive Touch (USB)
- Speakers (Optional) : 2 x Speaker
- OSD : 5 Keys: - , + , Power , Esc , Enter

Accessories

- Accessories : VGA cable (1.8m)
HDMI cable (2m)

*Outside dimension and I/O will be different from standard

Power Considerations

- Power Input/Power Over Ethernet : Power Device (PD) follows IEEE 802.3at (25 W), IEEE 802.3af (15 W)
- Power Consumption : 12W typical , Normal operation

Environment

- Operating temperature : 0~50°C
- Storage Temperature : -10~60°C
- IP Rating : Front IP65
- Certifications : CE, FCC

