



Main Features

- Onboard Rockchip RK3399 ARM® Cortex®-A72 and Cortex®-A53
- 2 x 10/100/1000Mbps LAN Port
- 2 x HDMI 2.0, 1 x LVDS, 1 x eDP, 1 x MIPI DSI
- 2 x USB 2.0, 1 x USB 3.0, 1 x USB 2.0 OTG
- 1 x RS232/422/485
- 1 x mini-PCIe socket for optional Wi-Fi/3.5G/LTE modules
- Fanless and slim design
- Support Android

Product Overview

Powered by ARM® Cortex®-A72 Dual Core and Cortex®-A53 Quad Core, NDiS B116 can play rich multi-media contents with low power consumption. NDiS B116 is enclosed in a compact chassis and can be easily integrated to display devices, such as LCD TV or PDO at site installation with HDMI display output (up to HDMI 2.0 support 4K2K 60Hz), Giga LAN. NDiS B116 is suitable as an entry level digital signage player for advertising, messaging, and brand promotion.

Specifications

CPU Support

- Rockchip RK3399 64-bit Dual ARM® Cortex®-A72 and Quad Cortex®-A53
- Mali-T864 GPU, OpenGL ES1.1/2.0/3.0/3.1, OpenVG1.1, OpenCL, DX11

Memory/Storage

- Onboard 2GB DDR3
- Onboard 8GB eMMC flash

Display

- 2 x HDMI 2.0 (simultaneous dual display: 1 x 4K 60fps, 1 x 1080p)

LAN

- 2 x 10/100/1000Mbps LAN port

USB

- 2 x USB 2.0
- 1 x USB 3.0
- 1 x USB OTG

Audio

- 1 x Pin header support Mic-in/Line-out/Speaker-out

Front I/O

- Power button
- LED indicator
- 1 x RS-232/422/485 (COM2) (For NDiS B116-4G-16G only)
- 2 x RS-232 (TX/RX/CTS/RTS/DSR/DTR/DCD) (COM3, COM4 (COM3, 4) (For NDiS B116-4G-16G only)

Rear I/O

- 12V DC jack
- 1 x RS-232/422/485 (COM1)
- 2 x HDMI 2.0
- 2 x GbE LAN ports
- 1 x USB 2.0, 1 x USB 3.0, 1 x USB OTG
- 2 x ANT holes


Expansion

- 1 x mini-PCIe socket for optional Wi-Fi/3.5G/LTE modules

Dimensions

- 179.5mm (W) x 112.5mm (D) x 39.5mm (H) (with wall mount)

Dimension Drawing

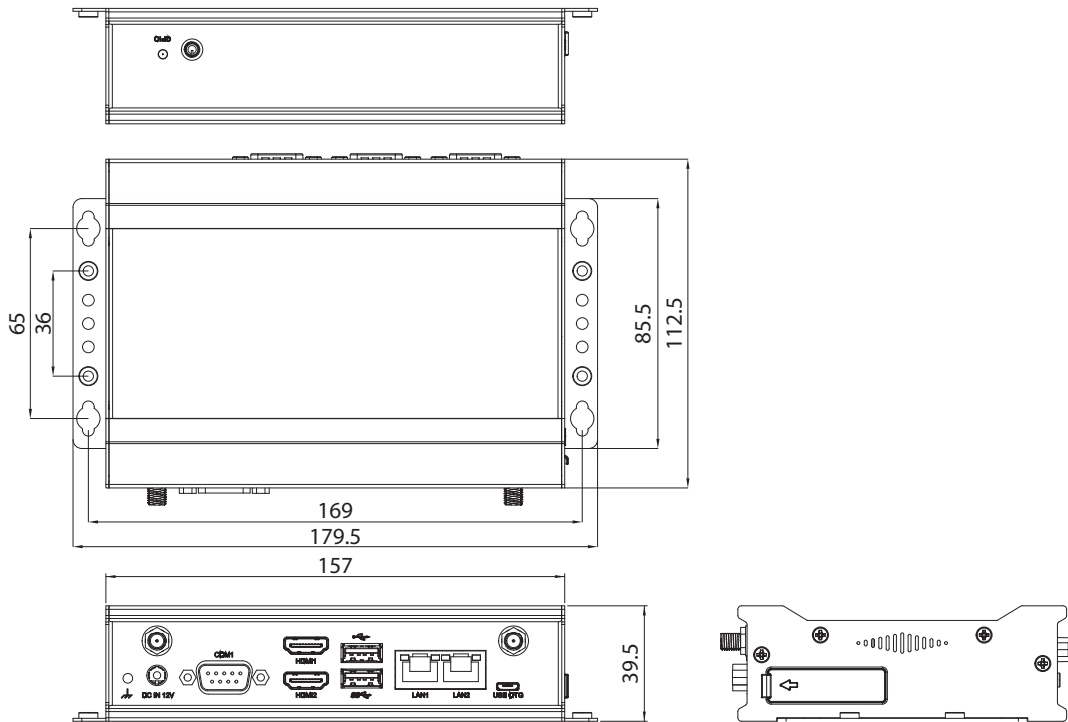

Power Supply

- 1 x External 60W AC/DC adapter
 - Input: 100~240VAC
 - Output: +12VDC

Environment

- Operating temperature: ambient with air flow from 0°C to 60°C
- Storage temperature: -20°C to 85°C
- Humidity: 10 to 95% (non-condensing)

Operating System

- Android 7.1

Ordering Information

◆ NDIS B116 (P/N: 10W00B11600X0)

Rockchip RK3399 ARM® Cortex®-A72 Dual Core and Cortex®-A53 Quad Core, onboard 2G LPDDR4 and 8G eMMC, 1 x COM

◆ NDIS B116-4G-16G (P/N: TBD)

Rockchip RK3399 ARM® Cortex®-A72 Dual Core and Cortex®-A53 Quad Core, onboard 4G LPDDR4 and 16G eMMC, 4 x COM