

IGS-1604XSM-16PH

16x 10/100/1000Base-T + 4x GbE/2.5G/5G/10GBase-X SFP with 16x PoE 300W

NEW



- Supports u-Ring, ERPS, MSTP, RSTP, STP for redundant cabling
- Auto checking and auto reset when PoE PD fail
- EN50121-4, EN62368-1, EN61000-6-2, EN61000-6-4, CE, FCC certified



Ver.2022 Jan

An Industrial 16-port PoE Gigabit Ethernet switch with 4-port 10 Gigabit SFP+ slot, supporting various types of 10 and 2.5 Gigabit optical small form-factor pluggable transceivers for long-distance and wide-bandwidth transmission, each PoE port support IEEE802.3af/at standard of the maximum 30W power output, each switch has a total power budget of up to 300Watts, used to connect and feed various types of Ethernet power devices, such as smoke sensors, Wi-Fi access points, femtocells, alarm centers, and IP cameras. the din-rail and fan less 20-port switch adopts an enhanced and hardened design for high surge protection, wide operating temperature and safety certified to meet critical and centralize strict requirements.

Features

- 48VDC (46~57VDC) redundant dual input power
 - Provides 16 port IEEE 802.3af / 802.3at PoE+ output ,30W per port, total 300W
 - Cable diagnostics, identifies opens/shorts distance
 - Provides 5 ring instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC μ-Ring white paper for more details and more topology application)
 - μ-Ring for redundant cabling, recovery time<10ms in 250 devices
 - Provides SmartConfig for quick and easy mass Configuration*
 - Supports SmartView™ for Centralized Management*
- *Please see Chapter 1- **Software Management** for more details

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet	Network Connector	16x 10/100/1000Base-T RJ-45 + 4x 100/1000/2.5G/5G/10GBase-X SFP connector
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet		RJ-45 UTP port supports Auto negotiation speed, Auto MDI/MDI-X function, SFP port supports 1G/2.5G/5G/10G speed with DDMI
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair	Console	RS-232 (RJ-45)
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic	PoE standard & RJ-45 Pin Assignment	16x IEEE 802.3af /IEEE 802.3at 2 pairs PoE, PoE+, 30W/port End-Span, Alternative A mode. Positive (V+): RJ-45 pin 1, 2. Negative (V-): RJ-45 pin 3, 6.
	IEEE802.3ae	10G bit/s Ethernet over Fiber	Network Cable	UTP/STP Cat. 5e cable or above EIA/TIA-568 100-ohm (100meter)
	IEEE 802.3af	PoE (Power over Ethernet)	Protocols	CSMA/CD
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)	Reverse Polarity Protection	Supported for power input
	IEEE 802.1d	STP (Spanning Tree Protocol)	Overload Current Protection	Supported
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)	CPU Watch Dog	Supported
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)	Power Supply	Redundant Dual DC 48V (46~57VDC) input power, (Removable terminal block) (50~57V input is recommended for IEEE802.3at PoE+ applications)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)	Power Consumption	TBD
	IEEE 802.1Q	Virtual LANs (VLAN)	PoE Power Budget	Maximum PoE Output power budget 30W / Per Port Total 300W
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication	LED	Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber)
	IEEE802.3ac	Max frame size extended to 1522Bytes		Per SFP Fiber port: 1G/2.5G Link/Active (Amber) 10G Link/Active (Blue)
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)		PoE Port LED 1 LED /per Port : • PoE Output Power On : ON (Green) • PoE Output Power Off : Off
	IEEE 802.3x	Flow control for Full Duplex		
	IEEE 802.1ad	Stacked VLANs, Q-in-Q		
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization		
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)		
	IEEE 802.3az	EEE (Energy Efficient Ethernet)		
Switch Architecture	Back-plane (Switching Fabric): 112Gbps Full wire-speed			
Data Processing	Store and Forward			
Flow Control	IEEE 802.3x for full duplex mode back pressure for half duplex mode			

Jumbo Frame	10KB
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)
MAC Address Table	32K
Memory Buffer	4M Bytes for packet buffer
Device Memory	128M Bytes Flash ROM, 2G Bytes RAM
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
DO(Alarm Relay Contact)	Relay outputs with current carrying capacity of 1 A @24VDC
DI Input	DI 17 to 30 V for state 1 0 to 15 V for state 0
Removable Terminal Block	Provides 2 terminal block for DO (Alarm Relay), DI, redundant power PWR1 and PWR2
Operating Temperature	-40 ~ 60°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	TBD
Weight	TBD
Installation Mounting	DIN Rail mounting, or wall mounting (Optional)
MTBF	TBD
Warranty	5 years

Certification	
EMC	CE (EN55032, EN55035)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-6 (CS) Level 3, Criteria A
Safety	EN62368-1 (Pending)
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-31
Vibration	IEC 60068-2-6

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE 802.1d STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ -Ring, μ -Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250 (Please see CTC Union μ -Ring white paper for more details and more topology application)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE 802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE 802.1p based CoS, IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps"
Bandwidth Control for Egress	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps" Per queue / Per port shaper
DiffServ (RF 2474) Remark	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port


Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4: TCP/UDP
RADIUS authentication & accounting TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name	Local Authentication
Password Authentication Management	Remote Authentication (via RADIUS / TACACS+)
Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
Modbus/TCP	Supports for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
FTP client	Supports for upload/download configuration
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
BOOTP	Supported
DHCP	Server, Client, Relay, Relay option 82 , Snooping
RARP	Supported
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported

IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE 802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity

Cable Diagnostic	Measuring UTP cable normal or broken point distance
Advanced PoE Management	PoE PD failure auto checking, and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power feeding priority Total PoE Power budget limitation: maximum 300W

Application

Figure 1 : Application Example

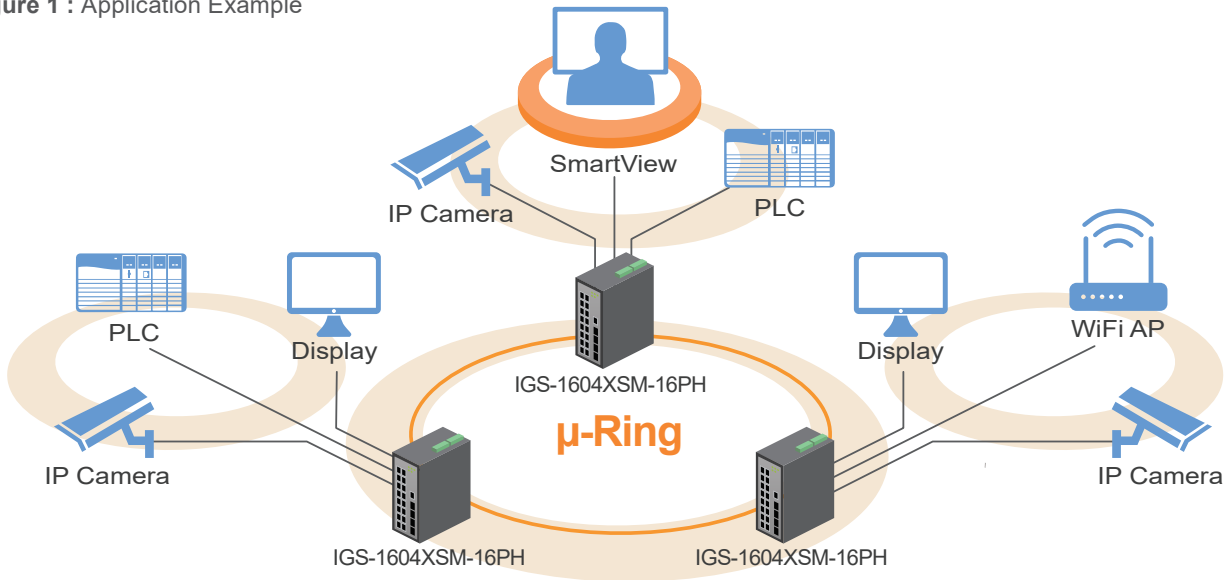

Ordering Information

Model Name	Total Port	UTP		Fiber	PoE Port		Input Power	Certification		Operating Temperature
		10/100/1000 Base-T	1000/2.5G/5G/10G Base-X	1000/2.5G/5G/10G Base-X	IEEE802.3at	Power Budget	Redundant	Railway EN50121-4	CE, FCC EN61000-6-2 EN61000-6-4	
IGS-1604XSM-16PH	20	16		4 SFP	16	300W	48VDC	V	V	-40~60°C

Optional Accessories

Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Wall Mount Kit

IND-WMK04 Wall Mount kit for Industrial product (Wide) (2 pcs in 1 set, 76mm x 75mm x 2pcs)

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M9000-85-D(E)	Industrial SFP 10GBase-SR MM, 300meter, wave length 850nm LC, DDMI, -10~70°C (-40~85°C)
ISFP-S9010-31-D(E)	Industrial SFP 10GBase-LR SM, 10km, 1310nm, 6.4dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

Industrial Power Supply

NDR-480-48 Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 480W, -20 ~ +70°C

Industrial Optical Fiber Bypass Switch

IBP-202 Optical Fiber Bypass Switch