



TERA Series

**Compact, Powerful and Fanless ;
Super Excellent heat-dissipating System**

Application :
Thin Client / Digital Signage / Networking

Technical Data :

• Dimension	56.5H x 145W x 106.2D mm
• Material	Aluminum
• Color	Black
• Weight	1.02 Kg (Incl. M/B)
• Storage Space	mSATA / SDD



2I610DW Back Panel

M/B information: (Please refer to M/B specification)




CPU Type	M/B Model	VGA	COM	LAN	USB	Other Functions	Operation Temp.	
							Industry mSATA	Industry SSD
Intel Skylake-U / Kaby Lake-U, i3 / i5 / i7 Celeron CPU	2I610DW	1	2	3	3	2 x mini Card, DC IN +9~36V	60°C	60°C

More Functions			
3G / 4G	Wi-Fi	DIO	Video-in

The above available functions outline the possibility with system, for more information please contact us.

Dimension

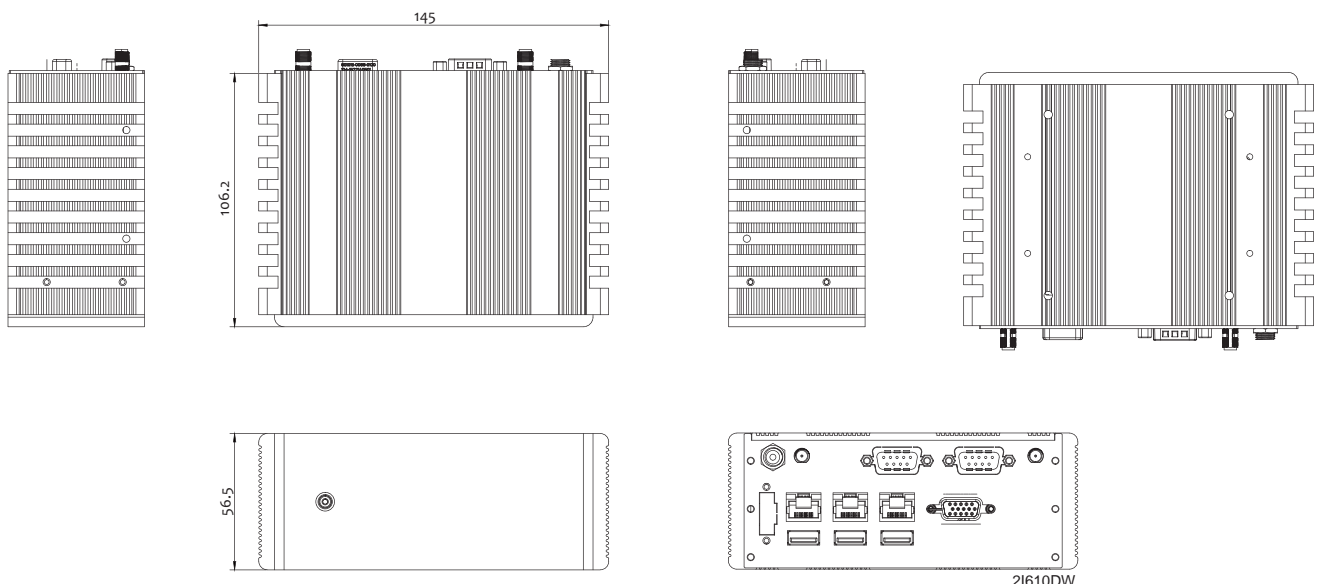

2I610DW



2I392CW + L2L001 Front Panel (OEM)

TERA Series

**Compact, Powerful and Fanless ;
Super Excellent heat-dissipating System**

Application :
Thin Client / Digital Signage / Networking

Technical Data :

Dimension	56.5H x 145W x 106.2D mm
Material	Aluminum
Color	Black
Weight	1.02 Kg (Incl. M/B)
Storage Space	mSATA / 2.5" HDD



2I390CW Back Panel



2I390CW + L2L001 Back Panel



2I390CW + L2L002 Back Panel



2I390CW + L2M001 Back Panel

M/B information: (Please refer to M/B specification)



CPU Type	M/B Model	VGA	COM	LAN	USB	Other Functions	Operation Temp.	
							mSATA	SSD HDD
Intel Apollo Lake N4200 / N3350 / E3950	2I390CW	N/A	2	2	4	DVI, HDMI, SIM, 3 x mini Card, DC IN +9~36V	70°C	70°C
	2I390CW + L2L001	N/A	Option	7	2	DVI, HDMI, 3 x mini Card, 1 x Fiber, DC IN +9~36V	70°C	—
	2I390CW + L2L2002	N/A	Option	6	2	DVI, HDMI, 4 x mini Card, 4 x SIM, DC IN +9~36V	70°C	—
	2I390CW + L2M001	N/A	Option	2	2	DVI, HDMI, 2 x mini Card, DC IN +9~36V	70°C	—
	2I392CW	N/A	2	2	4	2 x HDMI, 2 x mini Card, DC IN +9~36V	70°C	70°C
	2I392CW+L2L001	N/A	Option	7	6	2 x HDMI, 3 x mini Card, DC IN +9~36V	70°C	—



2I392CW Back Panel




2I392CW + L2L001 Back Panel

More Functions			
3G / 4G	Wi-Fi	DIO	Video-in

The above available functions outline the possibility with system, for more information please contact us.

Dimension

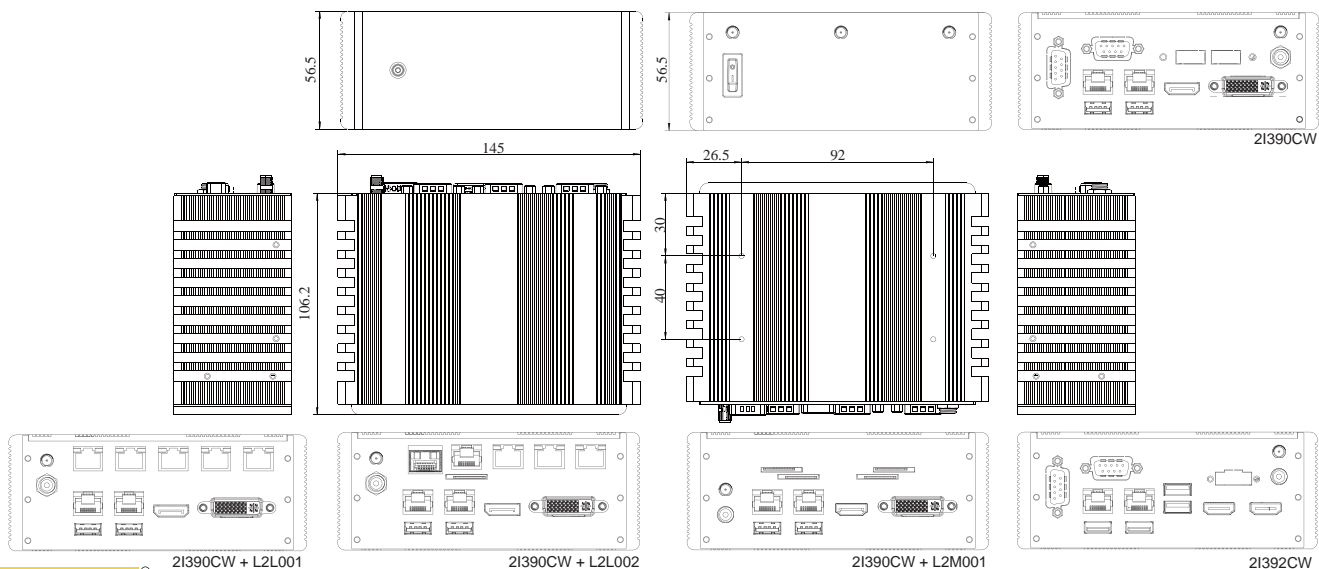



2I386EW / 2I385EW
+ L2M001 Front Panel (OEM)

2I386EW / 2I385EW
+ L2L002 Front Panel (OEM)

TERA Series

**Compact, Powerful and Fanless ;
Super Excellent heat-dissipating System**

Application :
Thin Client / Digital Signage / Networking

Technical Data :

• Dimension	56.5H x 145W x 106.2D mm
• Material	Aluminum
• Color	Black
• Weight	1.02 Kg (Incl. M/B)
• Storage Space	mSATA / 2.5" HDD



2I386EW / 2I385EW
/ 2I385CW Back Panel



2I386EW / 2I385EW
+ L2L002 Back Panel



2I386EW / 2I385EW
+ L2M001 Back Panel



2I380NX Back Panel

M/B information: (Please refer to M/B specification)



CPU Type	M/B Model	VGA	COM	LAN	USB	Other Functions	Operation Temp.	
							mSATA	SSD HDD
Intel Bay Trail E3845 / J1900	2I380NX	1	2	2 x PoE, 1 x GbE	2	DI/O, 2 x mini Card, DC IN +9~36V, 1 x Micro SIM	70°C	70°C
	2I380D	1	2	3	4	1 x mini Card, 1 x M.2, DC IN +12~24V	70°C	70°C
	2I386EW / 2I385EW / 2I385CW	1	4	2	2	2 x mini Card, DC IN +9~36V	70°C	70°C
	2I386EW / 2I385EW + L2L002	1	4	6	4	1 x SIM, 1 x Fiber, 3 x mini Card, DC IN +9~36V	70°C	—
	2I386EW / 2I385EW + L2M001	1	4	2	2	4 x SIM, 4 x mini Card, DC IN +9~36V	70°C	—

More Functions

3G / 4G	Wi-Fi	DIO	Video-in
---------	-------	-----	----------

The above available functions outline the possibility with system, for more information please contact us.

Dimension

