


Features

- Intel Coffee Lake-S Core i7/i5/i3/Pentium/Celeron LGA1151 processor
- Intel Gen.10 Intel Graphics DX 11/12, OGL 4.3/4.4
- Support Dual Channel DDR4 2133/2400 MHz
- 2 x DDR4 SO-DIMM, up to 32GB
- 1 x HDMI 2.0, 1 x DP, 1 x Dual Channel 24-bit LVDS/eDP
- 4 x USB 3.0, 4 x USB 2.0, 2 x SATA3
- 1 x Mini-PCIe, 1 x PCIe (x4), 1 x M.2 wifi, 1 x M.2 SSD
- 2 x Intel Gigabit Ethernet
- 1 x TPM Module IC (Optional)
- DC-in 12/19 - 24V power input

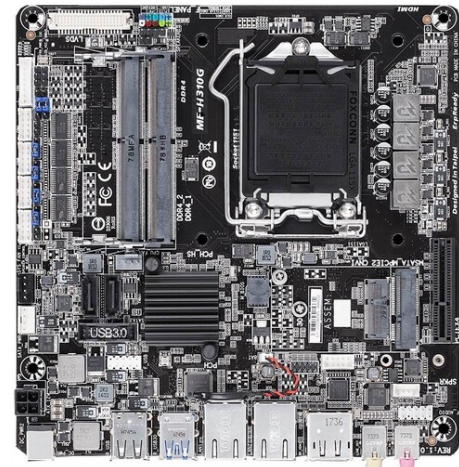

Core System

CPU	Intel 8th Coffee Lake-S LGA1151 Socket i7/i5/i3/Pentium/Celeron Processor TDP Max. 65W
System Memory	Dual Channel DDR4 2133/2400 MHz SO-DIMM, up to 32GB
Chipset	Intel H310
BIOS	AMI
Storage	2 x SATAIII, 1 x M.2 2260/80 slot
Watchdog Timer	1 - 255 steps by software program
Expansion Slot	1 x Full size Mini-PCIe slot co-lay with mSATA 1 x PCIe (x4) slot 1 x M.2 wifi, 1 x M.2 SSD, 1 x SIM
Power Input	DC-in 12V/ 19 - 24V, 4-pin ATX power connector
Smart Fan Control	-
Dimensions	170 x 170 mm
Operating Temperature	0°C to +60°C (+32°F to +140°F)
Storage Temperature	-20°C to +70°C (-4°F to +158°F)
Humidity	10% to 95% relative humidity, non-condensing

Rear I/O

USB	2 x USB 3.0 2 x USB 2.0
Display I/O	1 x HDMI 2.0 1 x Display Port
Audio I/O	1 x Mic-in / 1 x Line-out
LAN I/O	2 x RJ-45, Intel I219V Giga LAN + Intel I211-AT Giga LAN
Serial Port	-
PS/2 Port	-
Others	1 x DC Jack

Internal Connectors

USB	2 x USB 3.0 compliant 2 x USB 2.0
Display I/O	1 x VGA 1 x LVDS, 1 x Inverter
Audio I/O	-
Serial Port	4 x RS-232, COM1/2 support RS-232/422/485
Parallel Port	-
GPIO	1 x GPIO Header (Programmable support 4 in/4 out)
FAN	Support
Power	12/ 19 - 24 VDC-in, 4-pin ATX Power Connector, co-lay with phoenix con.
Others	1 x Mini-PCIe, 1 x I2C, 1 x SMBUS, 1 x SATA Power output

Graphics

Chipset	Intel Gen. 10 Graphics DX 11/12, OGL 4.3/4.4
VGA	Up to 1920 x 1200
DVI	-
HDMI	Up to 4K (3840 x 2160)
Display Port	Support
LVDS	Up to 1920 x 1200 @ 60Hz, co-lay with eDP
eDP	-

Others

OS Support	Windows 10, Linux
Certifications	CE / FCC