

## IPS215-4POE

## 4-Port 10/100Base-T(x) PoE + 1-Port 10/100Base-T(x)

## Unmanaged Industrial PoE Switch

## Features

- Support 4 10/100Base-T(X) PoE port and 1 10/100Base-T(X) Ethernet port
- Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3af/at, store and forward
- Support IEEE802.3af standard, full-port(PoE) full 15.4W power supply
- Support IEEE802.3at standard, single-port maximum 30W power supply.
- Ethernet port support 10/100M self-adaption
- 4 Fast Ethernet port support POE function
- DC48V power input, reverse connection protection
- IP40 protect grade, high strength iron shell, DIN Rail installation
- Industrial grade 4 design



## Introduction

The IPS215-4POE switch is a kind of unmanaged industrial PoE switch, it support 4 ports 10/100Base-T(X) PoE and 1 port 10/100BaseT(X). The 4 fast Ethernet port (1~4) support Power-over -Ethernet (PoE) function. The switches are classified as power source equipment (PSE), and when used in this way, the switches enable centralization of the power supply, providing up to 30 watts of power per port and reducing the effort needed for installing power. The switches can be used to power IEEE

802.3af/at standard devices (PD), eliminating the need for additional wiring.

It support CE, FCC standard, adopt industry standard design, IP40 protection, rugged high-strength metal case, power supply input (48VDC). The switch support IEEE802.3/ IEEE802.3u/ IEEE802.3x with 10/100M, full/half-duplex, and MDI/MDI-X auto-sensing, providing reliable and economic solution for your industrial Ethernet network.

## Specification

## Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3af/at

Flow control: IEEE802.3x flow control, back press flow control

## Exchange attribute

100M forward speed: 148810pps

Transmit mode: store and forward

System exchange bandwidth: 1.6Gbps

MAC address table: 2K

Memory: 1Mbit

## Interface

RJ45 port: 10Base-T/100Base-TX Self-adaption, Half/full duplex and MDI/MDI-X auto detect

POE Pin-out: 1/2(+), 3/6(-)

## Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)

## LED indicator

Interface indicator: Link (1~5)

Power supply indicator: PWR

Run indicator: Run

PoE indicator: POE (1~4)

## Power supply

Input Voltage: 48VDC (45~55VDC)

Type of input: 3 bits terminal block

Un-load consumption: 2.26W@48VDC

Full-load consumption: 73.97W@48VDC

Single PoE port maximum consumption: 30W@48VDC

## Working environment

Working temperature: -40 ~ 75°C

Storage temperature: -40 ~ 85°C

Relative Humidity: 5%~95 % (no condensation)

## Mechanical Structure

Shell: IP40 protect grade, metal shell

Installation: DIN-Rail

Weight: 370g

Size (W×H×D): 35mm×110mm×95mm

## Industry Standard

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 3

EN61000-4-4 (EFT), Level 3

EN61000-4-5 (Surge), Level 2

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32


Vibration: IEC 60068-2-6

## Certification

CE, FCC, RoHS, UL508 (Pending)

**Warranty: 5 years**

## Dimension (Unit: mm)

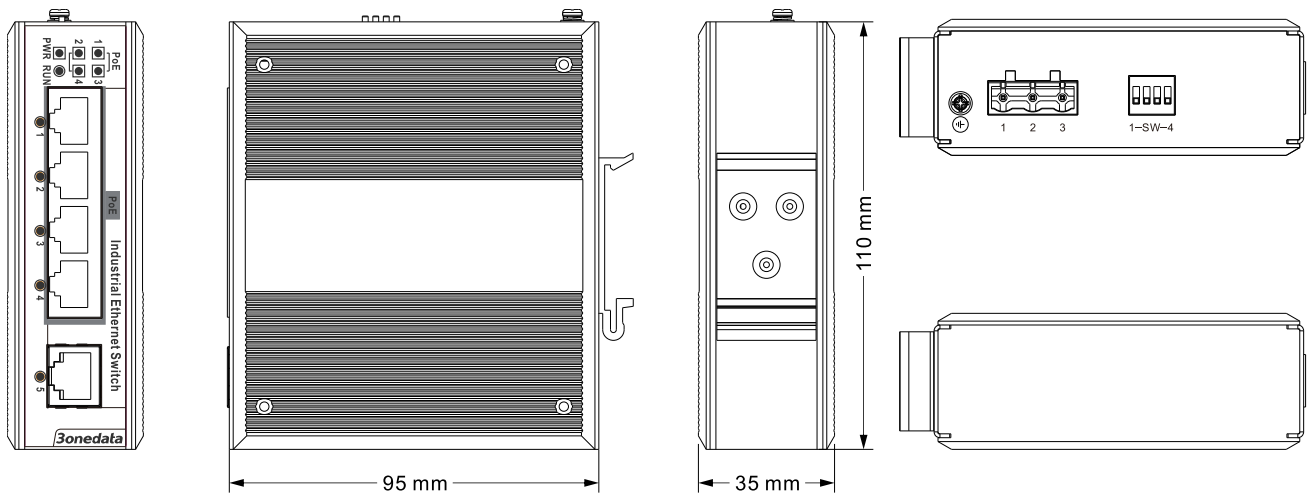

## Packing List

1. Industrial PoE Switch (plus terminal block) ×1
2. User manual × 1
3. Certificate of quality × 1
4. Warranty card × 1
5. DIN-Rail mounting kit × 1