


GIGAIPC

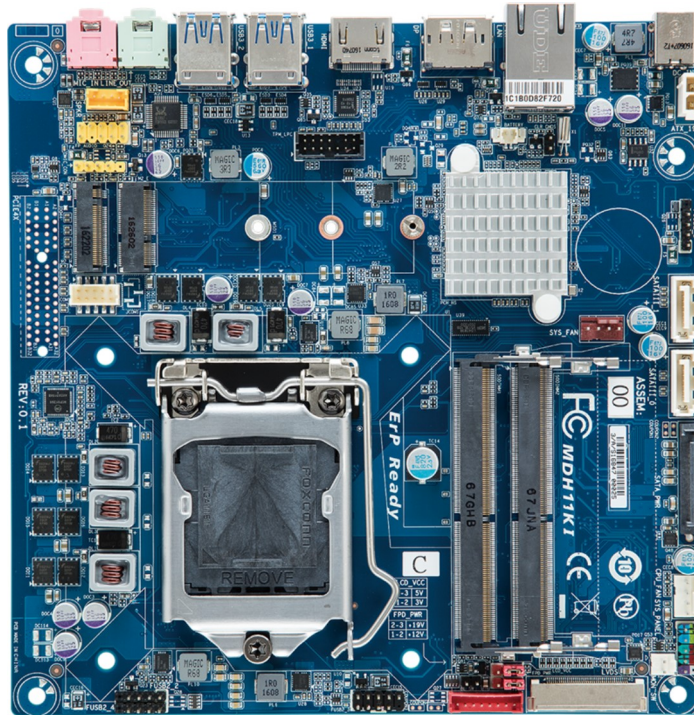

iTXL-H110C

Thin Mini-ITX with 7/6th Generation Intel® Core™ Processor, Dual channel DDR4 memory, 1 x COM, 9 x USB, 2 x SATA 6Gb/s

Key Features

- Thin Mini-ITX form factor
- Supports 7th / 6th Generation Intel® Core™ Processors
- Intel® H110 Express Chipset
- Dual Channel DDR4, 2 x SO-DIMMs
- 1 x GbE LAN port
- 2 x SATA 6Gb/s ports
- HDMI, Display Port, LVDS ports for multiple display
- Realtek ALC887 audio codec
- 1 x RS232 COM port

Application

SPECIFICATION

Thin Mini-ITX with 7/6th Generation Intel® Core™ Processor, Dual channel DDR4 memory, 1 x COM , 9 x USB, 2 x SATA 6Gb/s

FORM FACTOR	Thin Mini-ITX 170W x 170D(mm)
CPU	Support for 6/7th Generation Intel® Core™ i7 processors/ Intel® Core™ i5 processors/ Intel® Core™ i3 processors/ Intel® Pentium®processors/ Intel® Celeron® processors in the LGA1151 package TDP under 65W L3 cache varies with CPU
SOCKET	1 x LGA 1151
CHIPSET	Intel® H110 Express Chipset
MEMORY	2 x DDR4 SO-DIMM sockets supporting up to 32 GB of system memory Dual channel memory architecture Support for DDR4 2400/2133 MHz memory modules
ETHERNET	1 x GbE LAN port (Realtek® RTL8111HS)
VIDEO	Integrated Graphics Processor - Intel® HD Graphics support: 1 x HDMI port, supporting a maximum resolution of 4096x2160@30 Hz 1 x DP port, supporting a maximum resolution of 4096x2160@60 Hz 1 x LVDS port, supporting a maximum resolution of 1920 x 1080@60Hz * Support up to 2 displays at the same time * Support for HDMI 1.4 version * Maximum shared memory of 1024MB
AUDIO	Realtek ALC887 + ALC105 Amplifier High Definition Audio
STORAGE	2 x SATA 6Gb/s ports
EXPANSION SLOTS	1 x M.2 slot: - M-key - SATA 6Gb/s & PCIe x2 - Supports NGFF- 2260/2280 cards 1 x M.2 slot: - E-key - Supports NGFF-2230
INTERNAL I/O	1 x 2-pin ATX main power connector 2 x SATA 6Gb/s connectors 5 x USB 2.0 headers 1 x Front panel header 1 x Front panel audio header 1 x 3W Speaker out header