


# ASLAN-W722C

Fanless 21.5" Wide-Screen Industrial Panel PC with Intel® Celeron® Processor J1900

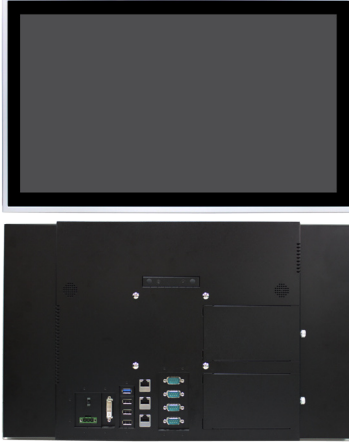

## Features

- 21.5" 1920 x 1080 FHD LCD Display w/ LED Backlight
- Flat panel with projected capacitive touchscreen
- Front panel compliant with IP65
- Anti-scratch surface: 7H hardness
- Vertical I/O Design
- Easy Maintenance Design for CFast/HDD/SSD
- Serial Ports (RS-232/485), RS-485 w/ Auto-flow Control
- Mini PCIe expansion slot support
- Fanless cooling system
- Cable-less Design
- Low power consumption
- 2 x SMA Antenna Holes for Optional WiFi Function
- 9~36V Wide-Range DC Input

## System

CPU	Intel® Celeron® Processor J1900
Memory	4GB DDR3L SO-DIMM RAM module installed 1 x DDR3L SO-DIMM Socket, supporting 1066/1333 MHz SDRAM up to 8GB
LAN	2 x Intel® I210AT GbE controllers 1 x Intel® I210IT GbE controller
Watchdog Timer	1~255 levels reset

## Storage

1st Device	2 x outside-accessible 2.5" drive bay
2nd Device	1 x CFast slot (Optional)

## Audio

Speaker	2 x 2W speakers (optional)
---------	----------------------------

## LCD Display

Size/Type	21.5" TFT LCD Panel
Max. Resolution	1920 x 1080, FHD
Max. Colors	16.2M
Luminance	250 cd/m <sup>2</sup>
Touch Screen	Projected capacitive touch panel
View Angle (U/D/R/L)	80°/80°/85°/85°

## Power System

Power Input	DC 9~36V
-------------	----------

## Certification

EMC / EMI	CE, FCC Class A
-----------	-----------------

## Expansion

Expansion Bus	1 x Mini-card socket (Full Size)
---------------	----------------------------------

## External I/O

Serial Ports	2 x RS232 & 2 x RS-232/485 w auto flow control
USB Ports	1 x Type-A USB 3.0 ports 3 x Type-A USB 2.0 port
LAN	3 x RJ-45 GbE ports
DVI	1 x DVI-I connector
WiFi	2 x SMA antenna holes for optional WiFi function

## Mechanical

Mounting Type	Panel Mounting and VESA-100 Mounting
Chassis	Panel-mounting chassis, aluminum front bezel and SECC steel chassis
Dimension (W x D x H)	536.00 x 48.40 x 332.00 mm (21.1" x 1.90" x 13.1")
Weight (Net)	7 kg (15.4 lb)

## Environmental


Operating Temp.	-20°C ~ 60°C (-4°F ~ 140°F)
Storage Temp.	-30°C ~ 70°C (-22°F ~ 158°F)
Operating Humidity	10 ~ 95% RH @ 60°C (non-condensing)
Vibration	5 ~ 500Hz, 2Grms Random (with CFast/SSD)
Shock	Operating 10G, 11ms Non-operating 30G, 11ms (with CFast/SSD)

## OS Support


W7 Pro / WS7E / W8.1 Industry / Linux: Ubuntu

## Ordering Information

ASLAN -W722C-1900G4	21.5" Intel® Celeron® Processor J1900 Wide-screen industrial panel PC with 4GB Memory
---------------------	--



# Dimensions

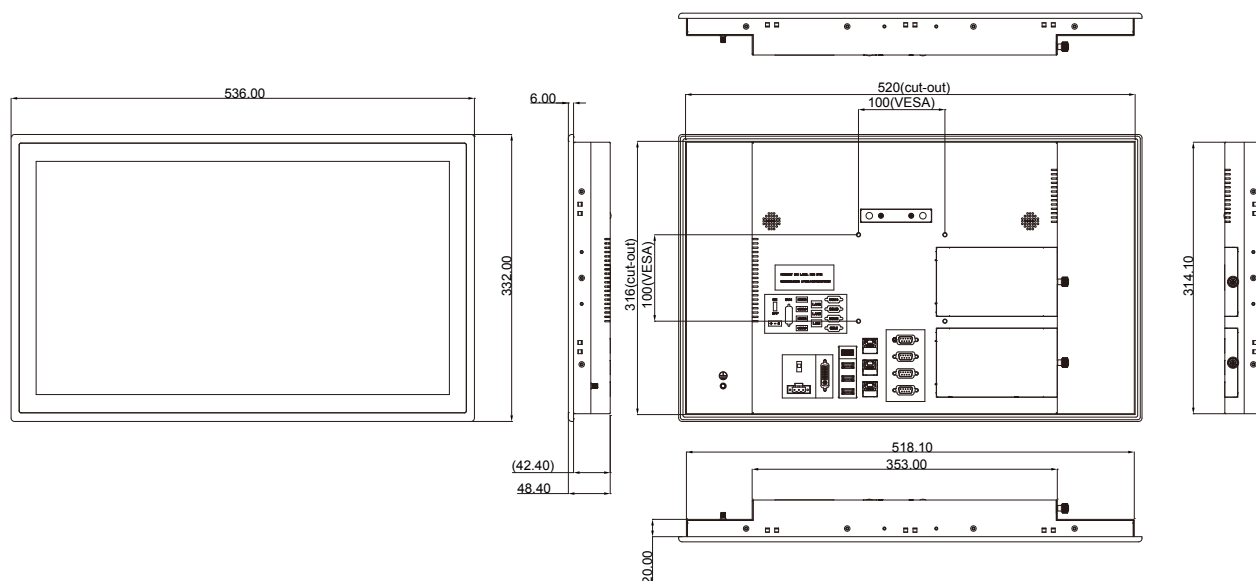

## Optional Accessories

PAC-P065W 19V/3.4A 65W AC/DC power adapter kit



## Optional Configuration (CTOS\* Kit)

80GB SSD Intel® 2.5" 80GB SATAIII SSD kit



WIFI-AT2350 Atheros AR9462 WiFi module w/ 20cm & 30cm internal wiring



ANT-D11 1 x WiFi Dual-band 2.4G/5G antenna



ADK-712 LYNC-71x audio kit



\*CTOS means Configure-to-Order Service.