

IS-RG628P-4F-24 Series

24+4 Port Industrial Managed PoE+ Gigabit Ethernet Switch



Key features

- ▶ 24x Gigabit Ethernet ports with IEEE 802.3at PoE+
- ▶ 4x 1000F(x) SFP Slot
- ▶ Built for harsh environments and wide temperature range application
- ▶ RSTP, MSTP, ERPS v2(I.A. Ring, I.A. Chain, v2), LACP for Network Redundancy
- ▶ QoS CoS/DSCP to increase determinism
- ▶ Supports IGMP Snooping v1/v2/v3, up to 512 groups
- ▶ DHCP Relay Option 82 for policies IP address assignment
- ▶ SNMP v1/v2c/v3 for network management
- ▶ Supports Storm Protection
- ▶ USB storage for configuration-free replacement
- ▶ Support industrial automation protocols Ethernet/IP and Modbus TCP
- ▶ Supports PoE PD Alive Check Function for PoE Device Power Recycle



Specification

Technology

Standards	IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX IEEE 802.3ab 1000BaseT IEEE 802.3z 1000BaseX IEEE 802.3x Flow Control IEEE 802.3az Energy-Efficient Ethernet IEEE 802.3af Power over Ethernet IEEE 802.3at PoE+ IEEE 802.3ad/802.1AX LACP IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid STP IEEE 802.1s Multiple STP ITU-T G.8032 / Y.1344 ERPS IEEE 802.1Q VLAN Tagging IEEE 802.1ad Stacked VLANs IEEE 802.1p Class of Service IEEE 802.1X Network Authentication IEEE 802.1AB LLDP IEEE 1588 PTP
Processing Type	Store and Forward

Switch Properties

Switch Fabric	56Gbps	Priority Queues	8 Queues
Jumbo Frame	9216bytes	ACL Group	512
MAC Table Size	16K	DRAM	DDR3, 256MB
VLAN Table Size	4094		
IGMP Group	512		
Packet Buffer	12Mbits		

Software Feature

Network Redundancy	RSTP, MSTP, G.8032 ERPSv2(I.A. Ring, I.A. Chain, v2), Port Trunking with LACP
Security	802.1X, RADIUS, TACACS+, SSL, SSH, ACL(Access Control List)
Management	IPv4, IPv6, Web, Telnet, Serial Console, CLI, SNMP v1/v2c/v3, uPnP
Diagnostics	RMON, SNMP Inform/Trap, Syslog, SMTP, Port Mirroring, LLDP
Configuration	DHCP Server/Client, Relay Option 82, TFTP, USB

Filter	802.1Q VLAN, Q-in-Q, IGMP Snooping v1/v2/v3, IGMP Querier, Independent Vlan Learning
Time Sync.	NTP, IEEE1588v2 OC (Software Timestamp), TC (Hardware Timestamp)
QoS	CoS, DSCP, WRR/SPQ Queuing, Storm Protection
PoE	Powering Status, PoE Monitoring, Scheduling, PD Alive Check
Industrial Profiles	Ethernet/IP, Modbus TCP, Profinet

Interface

RJ45 Port	24x 10/100/1000T(x) with PoE+, auto negotiation speed duplex mode, auto MDI/MDI-X
Fiber Port	4x 1000F(x) SFP Slot
PoE Pin Out	V+, V+, V-, V-, for pin 1, 2, 3, 6, Endspan, MDI Mode A
LED Indicators	Per unit: PWR1, PWR2(AC2/DC2), Fault, Ring Master, Ring State Ports: Link/Active with highest speed(Green), low speed(Amber) PoE: Output Power
Alarm Contact	1x relay output with current carrying capacity of 1A @ 24 VDC
Digital Inputs	1x isolated input from the electronics. +13 to +30V for state "1" -30 to +3V for state "0" Max. input current: 8mA
Button	Multiple functions reset button
Serial Console	1x RS232 in RJ45 connector with console cable, 115.2Kbps, 8N1
Storage	1x USB 2.0 storage for firmware update, configuration backup, restore, boot up and syslog

Power Requirements

Operation Voltage	90~264VAC, 48~57VDC, redundant dual inputs, >50VDC for PoE+ output recommended
Connection	AC socket, DC 4-pin terminal block
Power Consumption	0.38A@48V without PDs' consumption
PoE Power Budget	Max. 348W@AC with derating (50°C to 70°C, 2.5%/°C) or 720W@DC, for total PD consumption, Max. 30 W per PoE port
Protection	Overload Current Protected, Reverse Polarity Protected

Mechanical Construction

Enclosure	Aluminum / Steel metal
Protection Class	IP30
Dimensions	440x44x331 mm (WxHxD)
Weight	6.00 kg
Mounting	Rack Mounting


Environmental Limits

Operating Temperature	-40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 to 95%, (Non-Condensing)

Regulatory Approvals

EMI	FCC Part 15 Subpart B Class A, CE EN 55032 Class A
EMS	IEC61000-4-2 (ESD) IEC61000-4-3 (RS) IEC61000-4-4 (EFT) IEC61000-4-5 (Surge) IEC61000-4-6 (CS) IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	CE, FCC
MTBF	>100,000 hours
Warranty	5 Years

Dimensions (unit = mm)

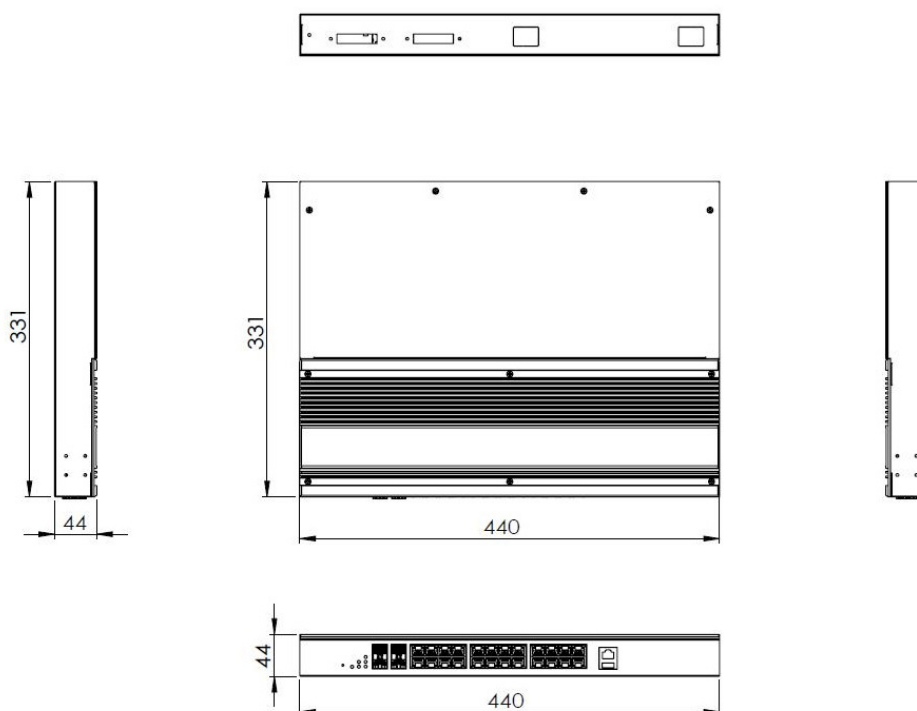

Ordering Information

Available Models	Description
IS-RG628P-4F-24-A	24+4 Port Industrial Managed PoE+ Gigabit Ethernet Switch - 24x 10/100/1000T(x) with 30W PSE + 4x 1000F(x) SFP Slot - Operating Temperature: -40°C ~ 75°C (-40°F ~ 167°F) - 1x 90~264VAC Power Input
IS-RG628P-4F-24-AD	24+4 Port Industrial Managed PoE+ Gigabit Ethernet Switch - 24x 10/100/1000T(x) with 30W PSE + 4x 1000F(x) SFP Slot - Operating Temperature: -40°C ~ 75°C (-40°F ~ 167°F) - 1x 90~264VAC Power and 1x 48~57VDC Power Input
IS-RG628P-4F-24-2D	24+4 Port Industrial Managed PoE+ Gigabit Ethernet Switch - 24x 10/100/1000T(x) with 30W PSE + 4x 1000F(x) SFP Slot - Operating Temperature: -40°C ~ 75°C (-40°F ~ 167°F) - 2x 48~57VDC Robust Isolation Power Input

Accessories

1. Gigabit SFP Modules

Package Checklist

- IS-RG628P-4F-24 Switch
- Wall Mount kit